


# FILM VIEWER DF-2C15

This viewer is designed suitably for such requirements since minute defect view ability is required when viewing a film. It is also designed for allowing a film with high density with a spot viewer adhered. Working efficiency of a worker is improved with a foot switch adhered.

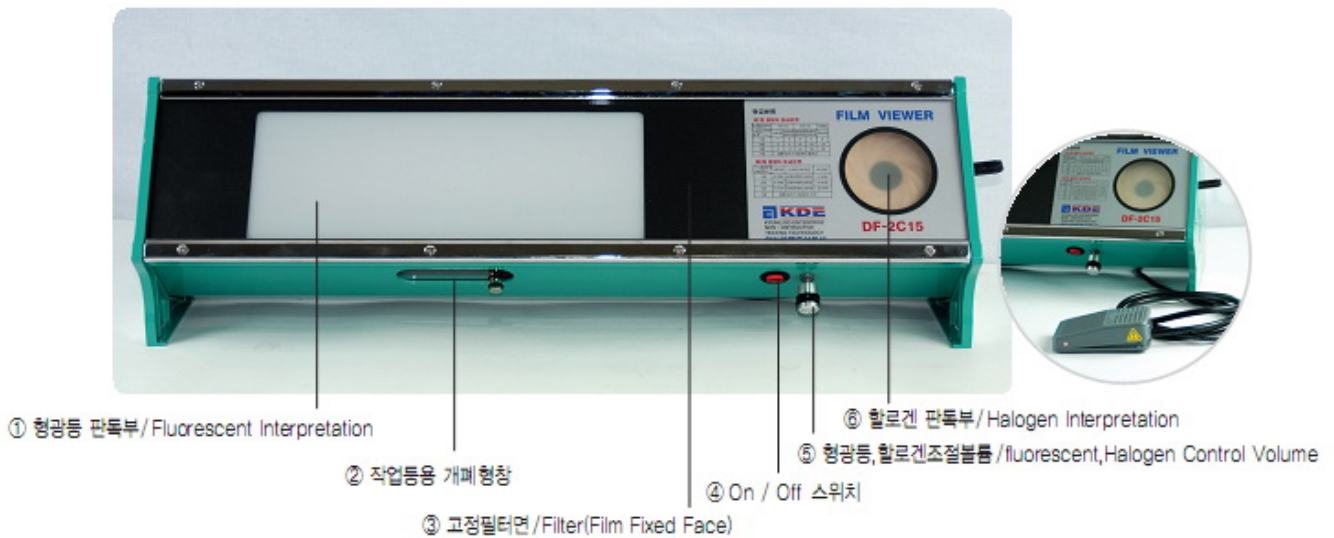

Illumination control device on fluorescent lamp helps operator to read films very easily DF-2C15 adopts electronic ballast for SWITCHING with high frequency. It would be effective to protect operator s eye against high luminance and flickering of lamp. A halogen lamp has a good advantage for reading POINT defects. The cooling fan is effective to reduce the heat and allows long working time Built-in mirror plate is helpful to raise illumination more effectively. By using Foot S/W operator could save working time for reading

## 사양 / SPECIFICATION

전원 / Power source	AC220V / 50/60Hz / 2.5A AC110V / 50/60Hz / 4.5A
재질 / Material	ALUMINUM 2T
램프 / Lamp	형광등(Fluorescent Lamp) 15W X 2EA, 할로겐(Halogen Lamp) 500W X 1EA
냉각팬 / Cooling Fan	AC 230V 50/60Hz 9/7W
크기 / Dimension	640(L) X 195(W) X 195(H)mm
조도 / Illuminance	20V 50/60Hz - 형광등(Fluorescent Lamp) 20,000Lux , 할로겐(Halogen Lamp) 200,000Lux이상 110V 50/60Hz - 형광등(Fluorescent Lamp) 18,000Lux , 할로겐(Halogen Lamp) 130,000Lux이상
무게 / Weight	220V 50/60Hz 7kg (케이블 포함) 110V 50/60Hz 8kg (케이블 포함)
판독마스크 / Viewing Mask	3 1/2 X 12" , 4 1/2 X 12"
전원 케이블 / Power cable	2m(0.75SQ X 3c), FOOT S/W cable : 2m